

Classic SWIFT Drawers

What makes Probox Classic SWIFT Drawers so special?


- A huge range of standard sizes to suit in-frame and lay-on applications
- Smooth, precision cut dovetails
- Clear lacquer 10% sheen
- 13mm solid oak walls and 10mm oak veneered base
- Notched for runners
- Next working day delivery
- Need a size or material outside the SWIFT Drawers, we can bespoke it



For every order we
recieve we pledge to
plant a tree



In stock, ready
for next day delivery




Order with runners

Page: 14

Specifications and Options


Standard Features




Created using
high quality
oak



Dovetail
Joints on all
Corners



10mm
Thick Base




13mm Sides



Flush Top




Notched to
Suit Runners



Clear Lacquer
10% Sheen



Fully
Assembled

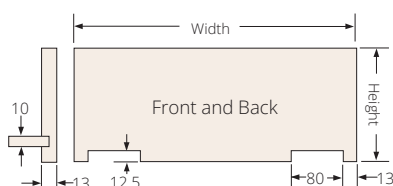


Classic SWIFT drawers are sized to suit the under-mount runners from Blum, Grass and other runner manufacturers, based on 18mm thick carcasses. For in-frame applications the sizes suit a 36mm wide face frame.

To Suit Kitchen Styles



Lay-on



In-frame

Specifications and Options

Drawer Configuration Options

Configuration			For Lay-on Units		For In-frame Units	
Cabinet External Width	Drawer Height	Drawer Depth	Order Code	Drawer Width	Code	Drawer Width
500	90	260	FCSS50026090	448	FCSI50026090	412
600	90	260	FCSS60026090	548	FCSI60026090	512
300	90	440	FCSS30044090	248	FCSI30044090	212
400	90	440	FCSS40044090	348	FCSI40044090	312
450	90	440	FCSS45044090	398	FCSI45044090	362
500	90	440	FCSS50044090	448	FCSI50044090	412
600	90	440	FCSS60044090	548	FCSI60044090	512
700	90	440	FCSS70044090	648	FCSI70044090	612
800	90	440	FCSS80044090	748	FCSI80044090	712
900	90	440	FCSS90044090	848	FCSI90044090	812
1000	90	440	FCSS100044090	948	FCSI100044090	912
1100	90	440	FCSS110044090	1048	FCSI110044090	1012
1200	90	440	FCSS120044090	1148	FCSI120044090	1112
400	180	440	FCSS400440180	348	FCSI400440180	312
500	180	440	FCSS500440180	448	FCSI500440180	412
600	180	440	FCSS600440180	548	FCSI600440180	512
700	180	440	FCSS700440180	648	FCSI700440180	612
800	180	440	FCSS800440180	748	FCSI800440180	712
900	180	440	FCSS900440180	848	FCSI900440180	812
1000	180	440	FCSS1000440180	948	FCSI1000440180	912
1100	180	440	FCSS1100440180	1048	FCSI1100440180	1012
1200	180	440	FCSS1200440180	1148	FCSI1200440180	1112
500	180	490	FCSS500490180	448	FCSI500440180	412
600	180	490	FCSS600490180	548	FCSI600440180	512
800	180	490	FCSS800490180	748	FCSI800440180	712
900	180	490	FCSS900490180	848	FCSI900440180	812
1000	180	490	FCSS1000490180	948	FCSI1000440180	912
1200	180	490	FCSS1200490180	1148	FCSI1200440180	1112

For in-frame applications specify 18mm pre-drilled oak spacers for use with drawer runners if required.



Runner Spacer Specifications

Technical Details

Code	Width	Depth	Height
IFS18	294	48	18